



**BONGO**  
TECHNOLOGIES

4G LTE Router + VoLTE POTS Line Replacement

## Data Link + Voice Link



Security &  
Access Control



Emergency Response



Emergency Call Box



Elevator Call Box

**Introducing the ONLY Enterprise-Grade Router That Simultaneously Leverages Both the Voice and Data Networks for POTS Line Replacement.**

Top Features Included Right Out of the Box



**Plug N Play**  
Just plug your analog DTMF device into Voice Link and it works.



**Tone Stabilization**  
Advanced 16khz HD audio for DTMF tone devices.



**PSTN Device Ready**  
Compatible with existing standard POTS/PSTN equipment.



**Secured Network**  
All devices are secured over the FirstNet network.



**Remote Management**  
Remotely manage FREE for first year.

Find out more at [www.bongotechnologies.com](http://www.bongotechnologies.com)


Contact us at [support@bongotechnologies.com](mailto:support@bongotechnologies.com)  
or call 920-461-2081

US Patent Nos 8676254, 9402326, 9485116 with other US and international patents pending.

# Data Link



## Super-charge Your Network With Bongo's Data Link 4G LTE Router!

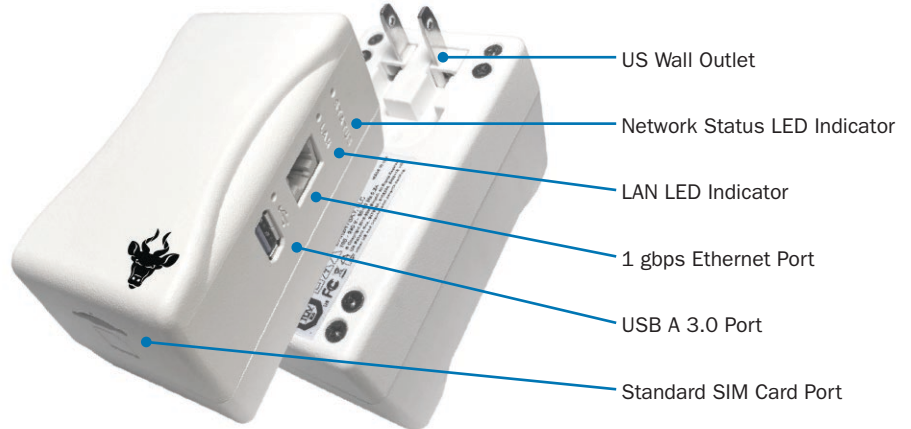

Seamless POTS line replacement over VoLTE with Bongo Vice Link Smart Dongle on FirstNet®.



### Ready to Make the Change?

[www.bongotechnologies.com](http://www.bongotechnologies.com)

<b>Networks</b>	BS6425L-AF-11 LTE FDD: B2/B4/B5/B12/B13/B14/B66/B71 WCDMA: B2/B4/B5 BS6425L-A-11 LTE FDD: B2/B4/B12 WCDMA: B2/B4/B5 BS6425L-V-11 LTE FDD: B4/B13	<b>Power Supply Requirements</b>	120/240 VAC at 10VA (10W) max
<b>Data Speeds</b>	LTE - FDD CAT4 Max150Mbps (DL), Max 50Mbps (UL) DC-HSPA+ DL 42 Mbps HSUPA – UL 5.76Mbps	<b>Outline Dimensions</b> (Less AC prongs and mounting tab)	4.1" (104mm) Height 2.2" (56mm) Width 2.0" (51mm) Depth
<b>WLAN</b>	Dual-Band/802.11 b/g/n/ac, WPA/WPA2/WPA2 Enterprise	<b>Weight</b>	7 oz (198 g)
<b>USB</b> (10/100/1000 Base-T)	(3.0) USB (Host) HS and FS	<b>Operating Temperature</b>	-10°C to +40°C
<b>LAN</b>	RJ-45 Modular Jack on side panel for TCP/IP, PPP, UDP	<b>Storage Temperature</b>	-30°C to +70°C
<b>SIM</b>	1.8V and 3.0V standard USIM (2FF)	<b>Approvals</b>	PTCRB, 3GPP FCC parts 2 and 15 CE, TUV
<b>LED Indicators</b>	Cellular network status (1 ea.) LAN traffic (1 ea.) USB traffic (1 ea.)	<b>Cellular Carrier Approvals</b>	AT&T, FirstNet, T-Mobile, US Cellular and Verizon
		<b>Patents</b>	US Patent Nos 8676254, 9402326, 9485116 with other US and international patents pending.

Find out more at [www.bongotechnologies.com](http://www.bongotechnologies.com)

Contact us at [support@bongotechnologies.com](mailto:support@bongotechnologies.com)  
or call 920-461-2081

# Voice Link



**Simple, Secure,  
and Smart  
POTS Line  
Replacement!**




RJ-11  
(Up to 325')



Traditional POTS  
Endpoints (RJ-11  
Output)

## Getting to Know the Voice Link Smart Dongle

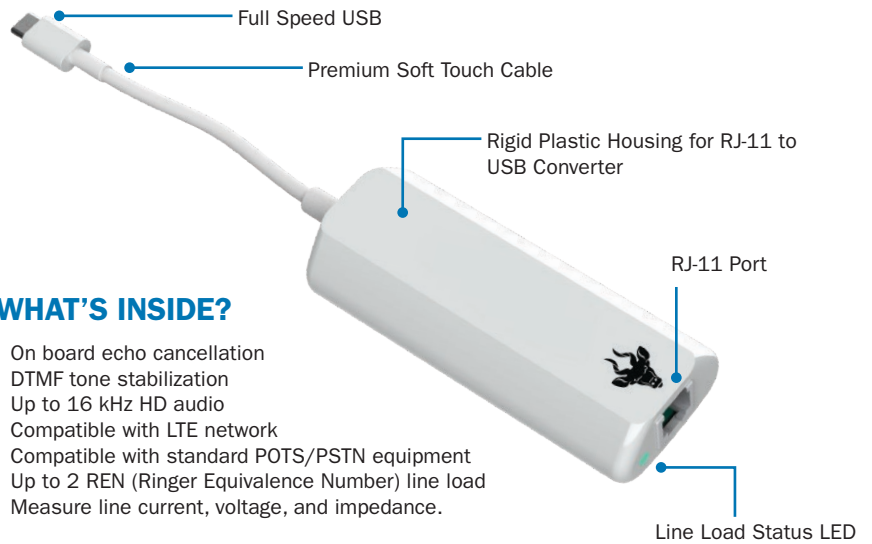

### WHAT'S INSIDE?

- On board echo cancellation
- DTMF tone stabilization
- Up to 16 kHz HD audio
- Compatible with LTE network
- Compatible with standard POTS/PSTN equipment
- Up to 2 REN (Ringer Equivalence Number) line load
- Measure line current, voltage, and impedance.

Ready to Make the Change? [www.bongotechnologies.com](http://www.bongotechnologies.com)

Certification/Compliance Standard	Description	Status
UL62368-1	Audio, Video, Communication Electrical Safety	Certified
FCC Part 15B Class B	FCC EMC Conformity	Certified
NFPA72	National Fire Alarm and Signaling Code	Compliant
ASME A17.1	Elevator Code	Compliant
PCI	Payment Card Industry Encryption	Compliant
HIPAA	Health Privacy	Compliant
UL1610	Central-Station Burglar-Alarm Systems	Compliant
UL985	Fire Warning Control Systems	Compliant
UL1023	Household Burglar Alarm Systems	Compliant
UL864	Accessories for Fire Alarm Systems	Compliant
UL2525	Two-Way Emergency Communications/Area of Refuge	Compliant

Find out more at [www.bongotechnologies.com](http://www.bongotechnologies.com)

Contact us at [support@bongotechnologies.com](mailto:support@bongotechnologies.com)  
or call 920-461-2081